
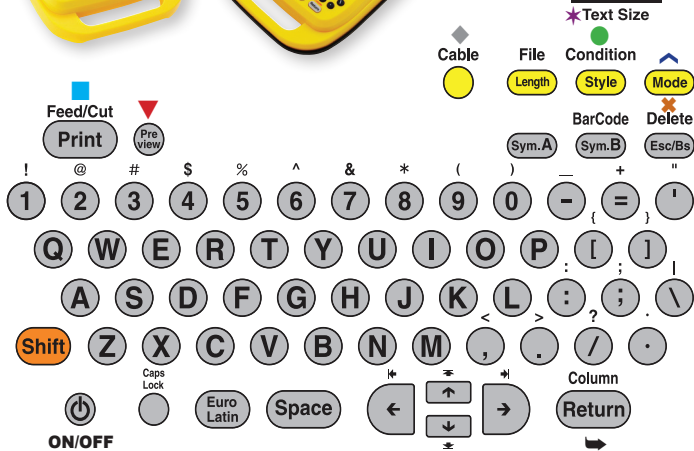


# Quick Start Guide



For help finding keys, locate these symbols on the keyboard above: ■ ▼ ◆ ● ▲ ✕ ☆

## Main Key Functions

- The **Return** ➡ key locks in your commands. Use it to select your settings.
- Use the ↓↑ arrow keys to scroll through settings.
- To **DELETE ALL** text, **HOLD** down **SHIFT** key and Press **DELETE ✕**. **[ALL]** Shows on Screen. Press **Return** ➡
- To **DELETE PARTIAL** text, use → ← Arrows to place Cursor to the right of the character to be erased. Press **DELETE ✕**
- To **Make a Simple Label**: Enter text. Press **Preview ▼**, Press **Print ■**



## Changing Text Size

1. Press **CONDITION ●**. **[LINES]** show on screen. Press **Return** ➡
2. Use ↓ to select number of lines: 1, 2, 3, or 4 Lines. Press **Return** ➡
3. Use Arrows to select **Text Size ☆** (shown in display) Press **Return** ➡
4. Scroll Down ↓ until screen shows **[END?]** Press **Return** ➡
5. **[LABEL]** shows on screen. Press **Return** ➡
6. Enter **TEXT**. Press **PRINT ■**



## Make a Simple Label





Let's make a serial number with date for your users manual.

1. Consult your box for the serial number.
2. Your display should show **1** (for line 1) and a flashing cursor. 
3. Enter the serial number. Press **Return** ➡
4. Your display should show **2** and a flashing cursor.
5. Enter today's date. DO NOT RETURN.
6. Press **Preview** . Review the information to see if it is correct.
7. Press **Print** ■
8. Peel off paper backing and apply.


## Change the Font




The BEE3®, BEE3+ comes with 14 fonts.

SansSerif	U& Roman	Reisho
SansS. HG	Roman	BR
SansS. ST	CL Roman	CB
Gothic	Mincho	Script PL
BoldGothic	Gyosho	

1. Press **Mode** . **Font** is highlighted.  Press **Return** ➡
2. Arrow  down to the desired font. Press **Return** ➡
3. Screen indicates **Mode/Decorate**. Arrow  down to **End?** Press **Return** ➡
4. Screen says **Area/Label**. Press **Return** ➡

## Cable Label

This allows you to create labels that wrap around a cable, wire, tube, pen or any other round-shaped materials. 

1. Choose a 218 (3/4" wide) tape cartridge.
2. Press **Shift** and the **Cable**  key.
3. Screen shows **Length Off**. Press **Return** ➡ 
4. On line 1 enter "PC01". Press **Return** ➡
5. On line 2 enter "PC01". Press **Return** ➡ 
6. On line 3 enter "PC01". Press **Return** ➡
7. On line 4 enter "PC01". Do Not Return.  
*Note: You can only enter 4 lines.*
8. Press **Print** ■

