

# Professional PC-Labeler For Safety Identification, Laboratory, and Medical Labeling














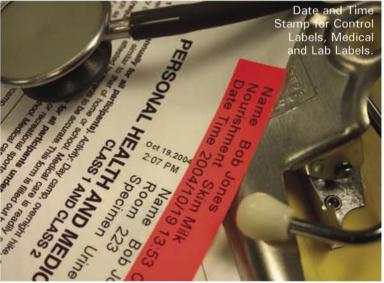







6 Labeling Tape Sizes (1/6", 1/4", 3/8", 1/2", 3/4", and 1"). Over 60 Color and Size Tape Combinations.

Plastic Curved Surfaces.

8 Bar Code Formats.
Industrial Adhesives

Hold Firm.

Use Flexible, Durable

Adhesive Backed Labeling

Tapes for Glass, Metal or

Connects with USB Cable. (provided)


Auto-Cut or Continuous Printing for Maximum Tube or Tape Flexibility. (up to 21 inches in length)

# Make the label you need, when you need it, in-house and on demand with professional PC-printer and software.



Use the power of your PC and the K-Sun LABELShop® 2010-PC printer to create professional labels in seconds.



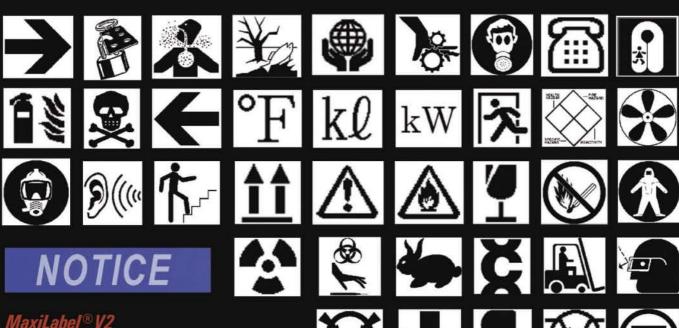

MaxiLabel® V2 Software Contains Over 500 ANSI Compliant Safety Symbols and Hundreds of General Symbols



Improve your safety ID program with compliant professional labels.

Directional and informational labels and small signs

Using different color tapes, create ANSI warning labels for equipment.







56 Measure Symbols and Abbreviations · 108 Personal Protection Equipment (PPE) · 33 Safety Warning and Emergency Symbols · 326 General Symbols for Video, Music, Plants, Animals, Vehicles, Food, Home, and Personal Items · 68 NFPA Diamonds, HMIS, WHMIS and Signal Words in English, French, Spanish, German, Italian and Portuguese · 117 (IMO) International Maritime Organization Symbols · 125 Industrial Facility Symbols · 49 ANSI Standards Safety Symbols · 21 Chemical and Radiation Symbols · 99 Sports and Entertainment Symbols · 60 Package and General Work Symbols · 125 Industrial Facility Symbols · 8 Lockout/Tagout · 8 Biohazard Symbols · 10 Safety Exit Symbols · 34 Target Organ Symbols · 49 International Characters · 16 Electrical · 17 Flammable · 23 Flow Arrows · 6 Environmental

















# MaxiLabel® V2 Software Specifications

New User-Friendly MaxiLabel® V2 Software Features Wizards, Drag and Drop Functions For Easy Label Design.

### **Recommended Operating Environment**

OS-Windows® 98, 98SE, ME, 2000 Professional, XP Professional, XP Home Edition

CPU-233MHz (XP: 500MHz)

**MEMORY-128MB (XP: 192MB)** 

HARD DISK-20MB

DRIVE-CD-ROM

DISPLAY-800x600 (SGVA/High Color Resolution)

INTERFACE-USB Port/USB Cable (included)

- 150 Pre-set Wizards-Speeds users through label design.
  - Tape Image Display-Previews tape background color and font color during label design function.
- Draw Graphics-Draws straight lines, squares, polygons, circles, fan, arc, bow, and Bezier curve.
- **Split Image Printing**-Creates labels up to 8 inches wide by dividing image over multiple tapes. Used for larger labels and signs.
- Uses Microsoft® Excel Files-In .xls or .cvs formats to create labels with pictographs and bar codes.
- Insert Text and Graphics-Multiple functions allow user to edit characters, graphics, blocks, typefaces, size, style, line types and thickness, background, borders, texture, and shapes. Import logos, symbols, images into label design.
- Print labels created with other software applications (Word, Excel, etc.).
- Templates-Includes Word 97/98/2000/2002 and Excel 97/2000/2002 templates enabling users to create text easily with appropriate format, margins and tape width settings.
- Easy-View Edit Screen-Lets user check label width and length at a quick glance.
- Multiple Label Design Functions

  –Bold, italics, underline, shadow, strike through, vertical, horizontal, outline, justification, alignment, rotate text and graphics, True Type fonts and more.
- Alpha-Numeric Sequence

   Use for parts, inventory, testing label identification.



Coated for durability and flexibility. Industrial grade adhesive labels for commercial, safety, medical, laboratory, and just about anywhere else.



# Tape and Shrink Tube Supplies

F	Polyolefi Colo		Tube (	- Constitution of the Cons	je
Ink on Tube	1/8"	3/16"	1/4"	3/8"	1/2"
Black on Red		205STBR			211STBR
Black on Yellow	203STBY	205STBY	208STBY		211STBY
Black on White	203STBW	205STBW	208STBW	210SBW	211STBW

1/6" 4mm		BLACK on white					
		#204BW					
1/4" 6mm	BLACK on clear	BLACK on white	BLACK on yellow	WHITE on black	BLACK on green	BLACK on blue	BLACK on red
	#206BC	#206BW	#206BY	#206WB	#206BG	#206BB	#206BR
3/8" 9mm	BLACK on clear	BLACK on white	BLACK on yellow	WHITE on black	BLACK on green	BLACK on blue	BLACK on red
-	#209BC	#209BW	#209BY	#209WB	#209BG	#209BB	#209BR
1/2" 12mm	BLACK on clear	BLACK on white	BLACK on yellow	WHITE on black	BLACK on green	BLACK on blue	BLACK on red
	#212BC	#212BW	#212BY	#212WB	#212BG	#212BB	#212BR
F	WHITE on vivid red	WHITE on vivid orange	WHITE on vivid green	WHITE on vivid blue		and vivid color - 26' (8M) tap	
	#212WR	#212WO	#212WG	#212WL			Fluoresce colors 16' (5N

Choose from 61
tape size and color
combinations and
11 heat shrink
tube cartridges!

3/4" 18mm	BLACK on clear	RED on clear	WHITE on clear	BLACK on white	BLACK on yellow	RED on white	WHITE on black	BLACK on gray	BLACK on blue	BLACK on red	BLACK on pink	BLACK on orange
	#218BC	#218RC	#218WC	#218BW	#218BY	#218RW	#218WB	#218BX	#218BB	#218BR	#218BP	#218BO
•	BLACK on green	BLACK on violet	WHITE on vivid red	WHITE an vivid orange	WHITE on vivid green	WHITE on vivid blue	WHITE on vivid gray	BLACK on fluorescent red	BLACK on fluorescent pink	BLACK on fluorescent orange	BLACK on fluorescent yellow	BLACK on fluorescent green
	#218BG	#218BV	#218WR	#218WO	#218WG	#218WL	#218WX	#218FR	#218FP	#218FO	#218FY	#218FG
1" 24mm	BLACK on clear	BLACK on white	BLACK on yellow	WHITE on black	BLACK on blue	BLACK on red	BLACK on green	WHITE on vivid red	WHITE on vivid orange	WHITE on vivid green	WHITE on vivid blue	Since colors shown here are printed, they are intended only to generally represent actual tape colors.

#224BB

#224WB

#### 8-Bar Code Formats

EAN-8/EAN-13	Height Width	Numbers Only can be entered (the check digit is calculated automatically and added) EAN–8: 7 digits/EAN–13: 12 digits Within a 0.1cm to 100cm range Within a 0.1mm to 25mm range
CODE 39	Height Width Ratio	Up to 32 digits including numbers, upper case letters, ".","" (space), "\$", " ", "+", "." and "%" can be entered.  Within a 0.1cm to 100cm range  Within a 0.1mm to 25mm range  2.5 to 3.0
Code 128	Height Width	Up to 32 digits including numbers, upper case letters, symbols and special codes can be entered. Within a 0.1cm to 100cm range Within a 0.1mm to 25mm range
UPC-A (check digit required)	Height Width	Up to 11 digits (numbers only) enterable Within a 0.1cm to 100cm range Within a 0.1mm to 25mm range
UPC-E	Height Width	Up to 6 digits (numbers only) enterable Within a 0.1cm to 100cm range Within a 0.1mm to 25mm range
NW-7 (CodaBar)	Height Width Ratio	Up to 32 digits enterable including numbers, ".",":", " $\$$ ", "]", "+" and "-". Within a 0.1cm to 100cm range Within a 0.1mm to 25mm range 2.5 to 3.0
ITF (Interleaved 2 of 5)	Height Width Ratio	Up to 32 digits (numbers only) enterable. Within a 0.1cm to 100cm range Within a 0.1mm to 25mm range 2.5 to 3.0

Ph: 1300 720 481 Fax: 1300 720 491 sales@meter.com.au

## Tape and Shrink Tube Specifications

K-Sun LABELShop® Tape and Shrink Tube Cartridges fit all K-Sun LABELShop® brand label printer models. The labeling tapes are made of durable, all weather polyester base material with a permanent, industrial grade acrylic adhesive. Tapes are flexible for curved surface labeling and the adhesive can be adhered to itself for wire tabbing and flagging. Tapes have 5–7 year outdoor life depending on exposure conditions.

#224WO

#224WG

#224WL

#224WR

The shrink tube material is an industrial grade polyolefin base material. The shrink rate of the shrink tube material is 50% or more in diameter and 15% or less in length.

Both labeling tape and shrink tube materials are printed with resin thermal transfer ribbon for UV, scratch, fade, chemical, and smear resistance.



#### K-Sun LABELShop® 2010-PC Kit Contains:

tape length

K-Sun LABELShop® 2010-PC Printer
MaxiLabel® V2 Software
USB Cable
1 Tape Cartridge
AC Power Adapter
Manual
Training CD



www.meter.com.au